


## ● コーナー部 形状図

MLウォールIV型／30°コーナー部

MLウォールIV型／25°コーナー部

コーナー部 形状図

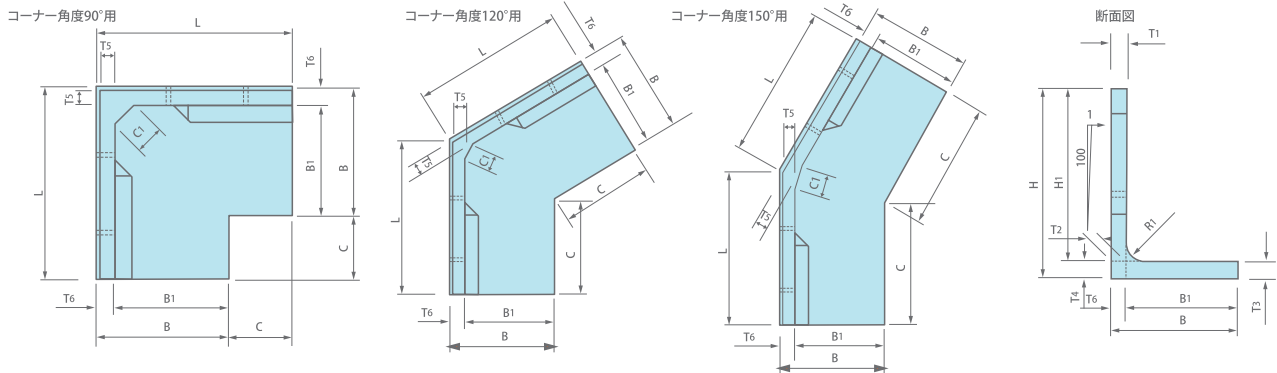

### ・ MLウォールIV型／30°コーナー部、MLウォールIV型／25°コーナー部

単位(mm)

呼び名	θ度	H1	B		C		L	T1	T2	T3	T4	T5	T6	C1	参考質量(kg)	
			30°	25°	30°	25°									30°	25°
750 - 90	90	650	550	600	450	400	1,000	102.5	109.0	100	100	102.5	110	150	515	526
750 - 120	120			683	625	551									582	
750 - 150	150			853	826	577									617	
1000 - 90	90	900	800	200	200	1,000	100.0	109.0	100	100	100.0	110	150	673	673	
1000 - 120	120			567	538									731	744	
1000 - 150	150			799	786									778	797	
1250 - 90	90	1,120	950	300	250	1,200	117.5	128.7	130	130	117.5	130	150	1,196	1,205	
1250 - 120	120			452	423									1,083	1,097	
1250 - 150	150			759	488									1,157	1,180	
1500 - 90	90	1,370	1,100	350	300	1,400	115.0	128.7	130	130	115.0	130	150	1,676	1,686	
1500 - 120	120			565	536									1,560	1,578	
1500 - 150	150			719	692									1,365	1,409	
1750 - 90	90	1,590	1,200	400	350	1,600	142.5	158.4	160	160	142.5	160	200	2,728	2,743	
1750 - 120	120			549	521									2,403	2,423	
1750 - 150	150			665	638									1,944	1,994	
2000 - 90	90	1,840	1,550	150	150	1,700	140.0	158.4	160	160	140.0	160	200	3,309	3,309	
2000 - 120	120			534	476									2,947	2,986	
2000 - 150	150			612	598									2,211	2,234	
2250 - 90	90	2,060	1,650	250	250	1,900	167.5	188.1	190	190	167.5	190	250	4,908	4,908	
2250 - 120	120			519	490									4,177	4,200	
2250 - 150	150			671	658									3,213	3,243	
2500 - 90	90	2,310	1,800	300	300	2,100	165.0	188.1	190	190	165.0	190	250	6,037	6,037	
2500 - 120	120			474	474									4,955	4,955	
2500 - 150	150			618	591									3,550	3,605	
2750 - 90	90	2,530	1,950	350	350	2,300	192.5	217.8	220	220	192.5	220	300	8,397	8,397	
2750 - 120	120			616	616									7,072	7,072	
2750 - 150	150			664	664									4,933	4,933	
3000 - 90	90	2,780	2,370	60	60	2,430	190.0	217.8	220	220	190.0	220	300	9,671	9,671	
3000 - 120	120			730	730									8,600	8,600	
3000 - 150	150			837	824									6,283	6,327	

※上表以外のコーナー角度についても御注文により1°刻みで製造いたします。